



ANTENNA COUPLER SX SERIES

THE BARRIER WITH INTEGRATED SURGE PROTECTION

Solexy's Patented (7,057,577) explosion-proof antenna coupler allows the installation of non-EX certified antennas in hazardous areas.

This coupler is designed to be used directly with listed explosion-proof housings or conduit fittings.

An integrated blocking circuit prevents hazardous energy from reaching the antenna if a radio, a modem or an access point failure occurs. It also allows for antenna removal in hazardous areas without turning off the device.

The coupler's smart design allows for connection to almost any radio system and its antennas, regardless of the radio protocol used. It is a highly flexible and cost effective solution to hazardous area radio deployment. The couplers act as a cable bulkhead as well, not taking any space inside the enclosure.

Fitting is approved for hazardous location and can be installed with a simple wrench avoiding any kind of sealing fittings.



SURGE PROTECTION

An integrated surge protection circuit, according to IEC61643-21 category C2, protects the radio from potential surges

SHORT CIRCUIT PROTECTION

Includes integrated blocking circuitry.

FLEXIBILITY AND NO SEALING FITTING REQUIRED

Permits a wide variety of passive antennas to be installed in hazardous locations, Antenna may be removed and/or installed with power on. Can be screwed directly in the enclosure and works perfectly as a cable bulkhead connection.

CERTIFICATIONS

The SX series is certified ATEX, IECEx, cQPS (USA & Canada), INMETRO (Brazil), JPN EX (Japan) as an apparatus, and therefore can be installed per the conditions of acceptability, without further assessment.

North America approval includes Class & Divisions and Zones.

IECEx certification is issued from an Australian notified body, therefore making the barrier suitable for Queensland mines installations.

ENVIRONMENTAL PROTECTION

All required circuitry is recessed into the fitting and encapsulated against harsh environments.

APPROVALS



ATEX / IECEx CERTIFICATION

Zone 1, 2, 21 & 22

Ex I M2 (M1) Ex db mb [ia Ma] I Mb; Ex II 2 (1) G Ex db mb [ia Ga] IIA/IIB/IIC T5...T6 Gb; Ex II 2 (1) D Ex mb tb [ia Da] IIIC T80°C...T100°C Db

Ex db mb [ia Ma] I Mb; Ex db mb [ia Ga] IIA/IIB/IIC T5...T6 Gb; Ex mb tb [ia Da] IIIC T80°C...T100°C

USA & CANADA CERTIFICATION

Class I, Div 1, GROUP ABCD; Cl II, Div 1, GROUP EFG; [Ex ia Ga] IIC; [Ex ia Da] IIIC; Cl I, Zone 1, AEx db mb [ia Ga] IIA/IIB/IIC T6...T5 Gb; Zone 21, AEx mb tb [ia Da] IIIC T80°C...T100°C Db; Ex db mb [ia Ga] IIA/IIB/IIC T6...T5 Gb; Ex mb tb [ia Da] IIIC T80°C...T100°C Db

INMETRO CERTIFICATION

Zone 1, 2, 21 & 22

Ex db mb [ia Ma] I Mb; Ex db mb [ia Ga] IIA/IIB/IIC T6...T5 Gb; Ex mb tb [ia Da] IIIC T80°C...T100°C Db

JPN CERTIFICATION

Zone 1, 2, 21 & 22

Ex db mb [ia Ma] I Mb; Ex db mb [ia Ga] IIA/IIB/IIC T6...T5 Gb; Ex mb tb [ia Da] IIIC T80°C...T100°C Db

CONFIGURATION



SX **N** **3** **S** **02** **00** **J** **XN**
a b c d e f g h

a - Antenna side connector

N N Female

b - Thread

3 3/4" NPT

M M25x1.5

c - Material

S Stainless steel AISI 303

L Stainless steel AISI 316L

d - Radio side connector

02 RP-SMA Female

e - Integrated coax lenght (radio side)

00 no cable (dual connector layout with connector on body)

f - Frequency range

R Optimized from 1 GHz to 3.9 GHz and from 4.6 GHz to 6 GHz

g - Certification

X0 ATEX/IECEx zone 1/21 apparatus

N0 North America class 1 & Div 1 apparatus

XN ATEX/IECEx zone 1/21 and North America class 1 & Div 1 apparatus

B0 INMETRO zone 1/21 apparatus

XJ Japan/ATEX/IECEx zone 1/21 apparatus

h - Extensions

-13 Max input 6W (standard max RF input 2W, see * in ambient temperature range section)

AVAILABLE ACCESSORIES

HEAVY DUTY ANTENNAS

Heavy duty antennas available in different frequencies and layout already evaluated for installation in classified area

COAX CABLE EXTENSIONS

Coax cable with custom connectors and lenght to connect barrier to radio device or to remote mounted antennas



SPECIFICATIONS


GENERAL																																								
ATEX certification	<p>nr. TÜV CY 18 ATEX 0206158 X</p> <p>Standards: EN IEC 60079-0:2018, EN 60079-11:2012, EN 60079-31:2014, EN 60079-1:2014, EN 60079-18:2015/A1:2017</p>																																							
IECEx certification	<p>nr. IECEx MSC 19.0001X</p> <p>Standards: IEC 60079-0:2017, IEC 60079-11:2011, IEC 60079-31:2022-01, IEC 60079-1:2014-06, IEC 60079-18:2017</p> <p>Suitable for Queensland mines</p>																																							
North America certification	<p>nr. LT1504-3R2</p> <table><tr><td>CAN/CSA C22.2 No. 60079-0:2015</td><td>UL 60079-0, edition 6.0</td></tr><tr><td>CAN/CSA C22.2 No. 60079-1:2016</td><td>UL 60079-1, edition 7.0</td></tr><tr><td>CAN/CSA C22.2 No. 60079-11:2014</td><td>UL 60079-11, edition 6.0</td></tr><tr><td>CAN/CSA C22.2 No. 60079-18:2016</td><td>UL 60079-18, edition 4.0</td></tr><tr><td>CAN/CSA C22.2 No. 60079-31:2015</td><td>UL 60079-31, edition 2.0</td></tr><tr><td>CAN/CSA C22.2 No. 60950-1:2007</td><td>UL 60950-1, edition 2.0</td></tr><tr><td>CAN/CSA C22.2 No. 25-17</td><td>UL 1203, edition 5.0</td></tr><tr><td>CAN/CSA C22.2 No. 30-M1986</td><td>UL 913, edition 8.0</td></tr><tr><td>CAN/CSA C22.2 No. 157-92</td><td>UL 508, edition 17</td></tr></table>	CAN/CSA C22.2 No. 60079-0:2015	UL 60079-0, edition 6.0	CAN/CSA C22.2 No. 60079-1:2016	UL 60079-1, edition 7.0	CAN/CSA C22.2 No. 60079-11:2014	UL 60079-11, edition 6.0	CAN/CSA C22.2 No. 60079-18:2016	UL 60079-18, edition 4.0	CAN/CSA C22.2 No. 60079-31:2015	UL 60079-31, edition 2.0	CAN/CSA C22.2 No. 60950-1:2007	UL 60950-1, edition 2.0	CAN/CSA C22.2 No. 25-17	UL 1203, edition 5.0	CAN/CSA C22.2 No. 30-M1986	UL 913, edition 8.0	CAN/CSA C22.2 No. 157-92	UL 508, edition 17																					
CAN/CSA C22.2 No. 60079-0:2015	UL 60079-0, edition 6.0																																							
CAN/CSA C22.2 No. 60079-1:2016	UL 60079-1, edition 7.0																																							
CAN/CSA C22.2 No. 60079-11:2014	UL 60079-11, edition 6.0																																							
CAN/CSA C22.2 No. 60079-18:2016	UL 60079-18, edition 4.0																																							
CAN/CSA C22.2 No. 60079-31:2015	UL 60079-31, edition 2.0																																							
CAN/CSA C22.2 No. 60950-1:2007	UL 60950-1, edition 2.0																																							
CAN/CSA C22.2 No. 25-17	UL 1203, edition 5.0																																							
CAN/CSA C22.2 No. 30-M1986	UL 913, edition 8.0																																							
CAN/CSA C22.2 No. 157-92	UL 508, edition 17																																							
INMETRO certification	<p>nr. CPEx 22.0953 X</p> <p>Standards: IEC 60079-0:2020, IEC 60079-11:2013, IEC 60079-31:2022, IEC 60079-1:2016, IEC 60079-18:2020</p>																																							
Japan certification	<p>nr. CML 23JPN1169X</p> <p>Standards: IEC 60079-0:2017, IEC 60079-11:2011, IEC 60079-31:2022-01, IEC 60079-1:2014-06, IEC 60079-18:2017</p>																																							
Maximum fault voltage	250VDC, 250VAC 50-60 Hz																																							
Typical insertion loss @ 20°C (dB)	<table><tr><td>Frequency</td><td>100</td><td>169</td><td>433</td><td>500</td><td>900</td><td>1.9</td><td>2.4</td><td>3</td><td>3.5</td><td>4.6</td><td>5.8</td><td>6</td></tr><tr><td></td><td>MHz</td><td>MHz</td><td>MHz</td><td>MHz</td><td>MHz</td><td>GHz</td><td>GHz</td><td>GHz</td><td>GHz</td><td>GHz</td><td>GHz</td><td>GHz</td></tr><tr><td>R version</td><td>-</td><td>-</td><td>-</td><td>-1.5</td><td>-1.2</td><td>-0.5</td><td>-0.7</td><td>-0.7</td><td>-1.6</td><td>-1.2</td><td>-2.4</td><td>-2.1</td></tr></table>	Frequency	100	169	433	500	900	1.9	2.4	3	3.5	4.6	5.8	6		MHz	MHz	MHz	MHz	MHz	GHz	GHz	GHz	GHz	GHz	GHz	GHz	R version	-	-	-	-1.5	-1.2	-0.5	-0.7	-0.7	-1.6	-1.2	-2.4	-2.1
Frequency	100	169	433	500	900	1.9	2.4	3	3.5	4.6	5.8	6																												
	MHz	MHz	MHz	MHz	MHz	GHz	GHz	GHz	GHz	GHz	GHz	GHz																												
R version	-	-	-	-1.5	-1.2	-0.5	-0.7	-0.7	-1.6	-1.2	-2.4	-2.1																												
Approximate weight	0,32 Kg (0,70lb)																																							
NEMA rating	Provides a NEMA 4X when connected to a NEMA 4X rated enclosure																																							
Impedance	50 Ω																																							
Ambient temperature range	<p>-40°C (-40°F) to +85°C (+185°F) if max RF input = 2W (T5)</p> <p>-40°C (-40°F) to +80°C (+176°F) if max RF input = 6W (T5) *</p> <p>-40°C (-40°F) to +70°C (+158°F) if max RF input = 2W (T6)</p> <p>-40°C (-40°F) to +65C (+149°F) if max RF input = 6W (T6) *</p>																																							

Data contained in this specification are subject to change without notice




DIMENSIONAL DRAWINGS

In inches

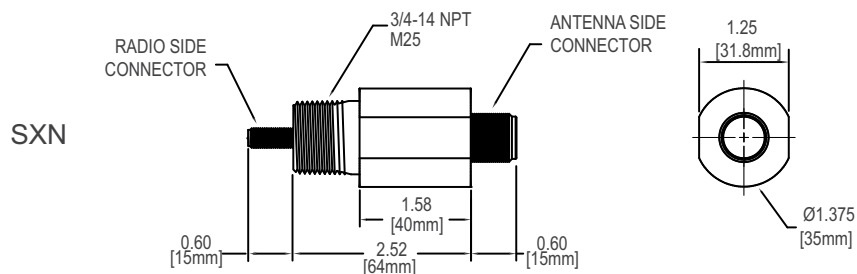

SX Series with
coax cable embedded
(optional execution on request)

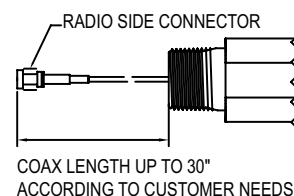

INSTALLATION EXAMPLE

The barrier stays outside the enclosure not taking any space inside of it and generating a little offset of the antenna from the housing to provide better radio performances



Data contained in this specification are subject to change without notice





SOLEXY srl

Via Enrico Fermi, 2
25015 Desenzano del Garda (BS) **Italy**
Phone (+39) 030 787.0.787
Email: info@solexy.net

SOLEXY USA, LLC

PO Box 628
West Chester, Ohio 45071 **USA**
Phone: (+1) 513.860.5465
Email: usa@solexy.net



www.solexy.net