



EXPLOSION PROOF RF JUNCTION BOX

Solexy's explosion proof RF junction boxes are specifically designed to allow a radio frequency coax cable junction/ extender in hazardous location.

There are many installations of RF systems where you are going from a non-rated area to a classified one. With the Solexy HWA and HWS RJ junction boxes there is now a solution for this type of installation.

Thanks to our RX, SX or UX series, mounted on our RF JB, connection in hazardous area of antennas is now possible. The intrinsically safe output from the antenna barriers allow for use of standard antenna in hazloc.

The RF junction boxes can have up to 2 antenna connections per box, and are available in two configurations:

The HWA series is made of a corrosion resistant low copper aluminium; It is powder coated as well to prevent corrosion in the hashest environments.

The HWS series is made of 316 series stainless steel (CF8M); This box is built for the toughest environments where nothing else but stainless will do.



FEATURES

HEAVY DUTY CONSTRUCTION

Explosion proof enclosure made in aluminium (HWA series) or stainless steel (HWS series)

WEATHER PROOF

IP 66/68

CABLE ENTRIES

M25X1,5 or 3/4" NPT

DUAL ANTENNA LAYOUT

Available double antenna connection for spreading signals of 2 antennas from a single box

APPROVALS



ATEX / IECEx CERTIFICATION



Zone 1, 2, 21 & 22

I M2(M1) Ex db mb [ia Ma]

I Mb (SWS only)

II 2(1) G Ex db mb [ia Ga] IIA/IIB/IIC T6... T5 Gb

II 2(1) D Ex mb tb [ia Da] IIC T80°C... T100°C Db

USA & CANADA CERTIFICATION

Class I, Division 1, Groups B, C and D T4

Class II, Division 1, Groups E, F and G T4

Class I, Zone 1, Groups IIB+H2 [For U.S only]

Zone 21, Groups IIIC [For U.S only]

Ta = -60°C to +80°C

AVAILABLE ACCESSORIES

MOUNTING BRACKET

KM-01: mounting kit for 2" pipe

KM-02: universal mounting kit

(see dedicated data sheet)



CONFIGURATION



HWA **0** **08** **03** - **42** **1** **X0**

a **b** **c** **d** **e**

a - Enclosure

HWA Aluminium polyester powder coated

HWS Stainless steel AISI 316 (CF8M) electropolished

b - Internal side connector

07 N Male

08 N Female

** Specific connector on request

c - Antenna connection ⁽¹⁾

03 n° 3 RXN antenna coupler (N Female) ⁽²⁾

33 n° 2 RXN antenna coupler (N Female) ⁽³⁾

08 n° 3 UXN antenna coupler (N Female) ⁽²⁾

88 n° 2 UXN antenna coupler (N Female) ⁽³⁾

d - Cable entries

42 n° 4 3/4" npt-f

44 n° 4 M25x1.5

e - Approvals

X0 Atex/IECEx Gas and Dust certified ⁽⁴⁾

M0 Atex/IECEx Gas, Dust and mining certified ⁽⁴⁾

N0 QPS CL1 DIV1 and North American Zones listed

Notes: (1) RX barrier (03, 33) for low frequencies application, UX barrier (08, 88) for high frequencies(above 1 GHz)
(2) Layout 2
(3) Layout 3 (consult dimensional drawings for specific layout)




SPECIFICATIONS

GENERAL	
ATEX certification	nr. FIDI 20 ATEX 0014 Standards: EN IEC 60079-0:2018, EN 60079-11:2012, EN 60079-31:2014, EN 60079-1:2014, EN 60079-18:2015+A1:2017
IECEx certification	nr. IECEx EXA 14.0001 Standards: IEC 60079-0:2017, IEC 60079-11:2011, IEC 60079-31:2013, IEC 60079-1:2014-06, IEC 60079-18:2017
North America certification	nr. LT1504-1R2 CSA C22.2 No. 30-M1986 CSA C22.2 No. 25-17 CSA C22.2 No. 94.2-15 UL 1203, Edition 5.0 UL 50E, Edition 2.0
Maximum input voltage	125VDC, 250VAC 60 Hz
Typical insertion loss	Check RX and UX antenna barrier datasheets for insertion loss data
Approximate weight	HWA: 2,1 Kg (4,6lb) (complete of 1 antenna barrier) HWS: 4,8 Kg (10,6lb) (complete of 1 antenna barrier)
IP rating	IP 66/68
Impedance	50 Ω
Ambient temperature range	-40°C (-40°F) to +80°C (+176°F)



Data contained in this specification are subject to change without notice



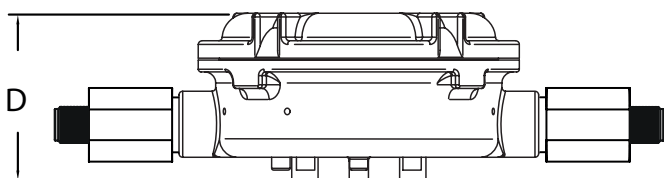

In order to determine overall dimension of a specific unit pls follow instructions:

- 1) Select the specific layout (you can find it in the product nomenclature)
- 2) Consider only the antenna coupler dimension (A) that you find in the layout

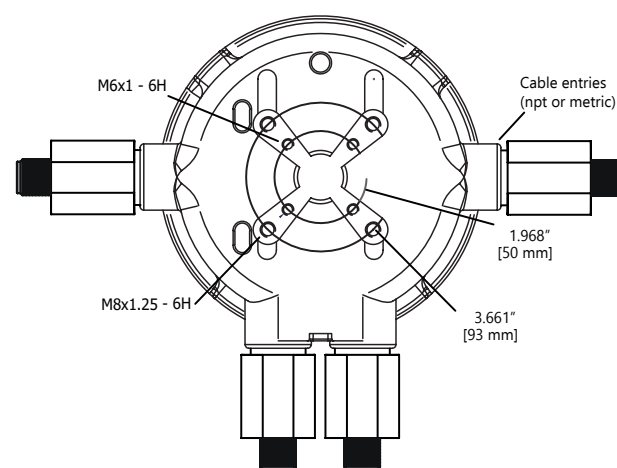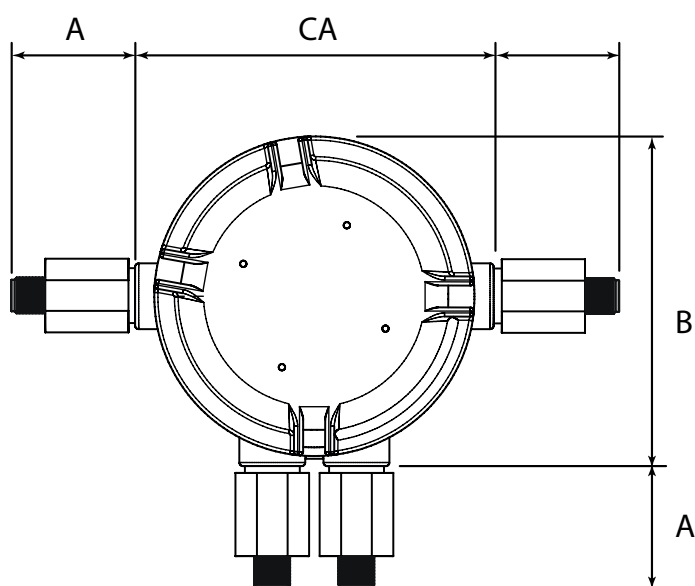


MODEL	A (*)	B	C	D
SWA HWA	58,5 mm [2.30"] metric coupler 70 mm [2.76"] npt coupler	179,8 mm [7.08"]	180 mm [7.09"]	89,5 mm [3.52"]
SWS HWS	58,5 mm [2.30"] metric coupler 70 mm [2.76"] npt coupler	180,5 mm [7.11"]	196 mm [7.72"]	90 mm [3.54"]


(*) max dimension related to RX or SX coupler with N female antenna connector

TYPICAL LAYOUTS **


Layout 1




Layout 2



Layout 3



Layout 4



(**) layout type specified in device datasheet





SOLEXY srl

Via Enrico Fermi, 2
25015 Desenzano del Garda (BS) **Italy**
Phone (+39) 030 787.0.787
Email: info@solexy.net

SOLEXY USA, LLC

PO Box 628
West Chester, Ohio 45071 **USA**
Phone: (+1) 513.860.5465
Email: usa@solexy.net



www.solexy.net